

6FM100D-X 12V 100Ah(10hr)



The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction


Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

Dimensions and Weight

Length(mm / inch).....330 / 12.99
 Width(mm / inch).....171 / 6.73
 Height(mm / inch).....215 / 8.46
 Total Height(mm / inch).....220 / 8.66
 Approx. Weight(Kg / lbs).....32 / 70.5

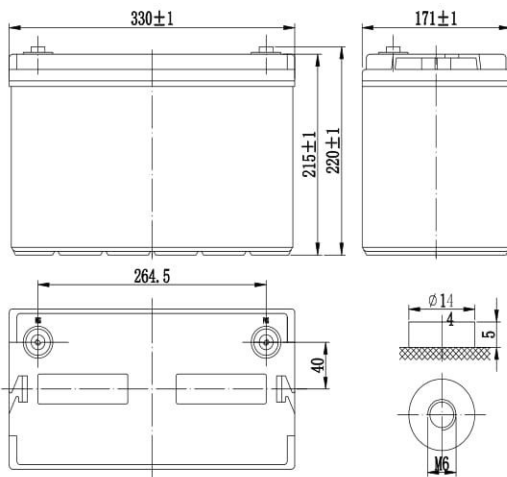

Performance Characteristics

Nominal Voltage 12V
 Number of cell 6
 Design Life 10 years
 Nominal Capacity 77°F(25°C)
 10 hour rate (10.0A, 10.8V)..... 100Ah
 5 hour rate (16.7A, 10.5V)..... 83.5Ah
 1 hour rate (61.6A, 9.6V)..... 61.6Ah
 Internal Resistance
 Fully Charged battery 77°F(25°C) 5mOhms
 Self-Discharge
 3% of capacity declined per month at 20°C(average)
 Operating Temperature Range
 Discharge -20~60°C
 Charge -10~60°C
 Storage -20~60°C
 Max. Discharge Current 77°F(25°C) 900A(5s)
 Short Circuit Current 2100A
 Charge Methods: Constant Voltage Charge 77°F(25°C)
 Cycle use 14.4-14.7V
 Maximum charging current 30A
 Temperature compensation -30mV/°C
 Standby use 13.6-13.8V
 Temperature compensation -20mV/°C

Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/cell	5min	10min	15min	30min	1h	3h	5h	10h	20h	100h
1.60V	328	224	185	105	64.5	26.4	18.4	10.4	5.39	1.20
1.65V	301	210	176	101	64.1	25.9	18.1	10.3	5.34	1.19
1.70V	274	195	166	97.5	64.4	25.3	17.9	10.3	5.28	1.18
1.75V	246	182	155	94.5	62.4	24.7	17.5	10.2	5.24	1.17
1.80V	218	166	146	92.5	60.4	24.0	17.2	10.0	5.03	1.16

Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/cell	5min	10min	15min	30min	45min	1h	2h	3h	5h	100h
1.60V	564	398	325	197	147	126	71.7	51.4	35.6	2.41
1.65V	525	378	320	191	142	124	70.6	50.9	35.4	2.41
1.70V	486	358	310	186	139	123	69.2	50.3	35.1	2.40
1.75V	448	339	298	180	136	118	68.0	49.7	34.9	2.39
1.80V	407	317	288	174	133	116	67.3	49.1	34.6	2.39

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

